

OPC- Waterproof Pigtail Series

Features:

Adopted to outdoor distribution.
 Connected to connectors of various models interconnect.
 Can be installed conveniently and operated simply.

Application:


More single-core cable design.
 Steel tape armoured.
 Waterproof and applicable rugged environment.



Specification:

Fiber	G652D, G651 (50/125)		
Insertion loss	Singlemode	PC≤0.3dB	APC≤0.2dB
	Multimode	PC≤0.5dB	
Return loss	Singlemode	PC≥50dB	APC≥60dB
	Multimode	UPC≥25dB	
Operating wavelength	Singlemode: 1310 nm -1550nm		Multimode: 850nm
Vibration	≤0.2db		
Exchangeability	≤0.2dB		
Operating temperature	-40 to +75℃		
Storage temperature	-40℃ ~ +80℃		

Waterproof Cable Parameter

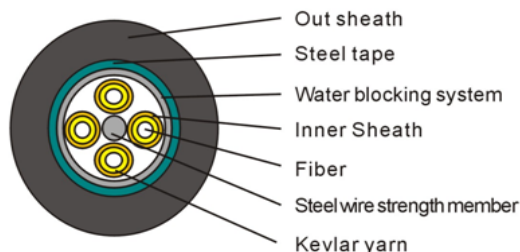

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		Minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)	
			Short term	Long term	Short term	Long term	Short term	Long term
2	10.50	155.00	1500	600	1000	300	20D	10D
4	10.50	155.00	1500	600	1000	300	20D	10D
6	11.50	185.00	1500	600	1000	300	20D	10D

Order Information:

OPC WPR-①-②-③-④

①Fiber Type

Single mode(9/125um)
 Multi mode(50/125um)
 Multi mode(62.5/125um)

②Core NO.

1=1 Core
 2=2 Core
 4=4 Core

 C=Customized

③Cable Length

1=1M
 2=2M
 3=3M

 C=Customized

④ Connector Type

FC/PC
 FC/APC
 SC/PC

 C=Customized