

# OPC- 1U Fiber Patch Panel

## Application:

Optical access network (OAN)  
 Data crossing centers  
 Cable television (CATV)  
 Local area network (LAN)  
 Coarse wavelength division  
 Can be used in PLC system  
 FTTH

## Features:

Removable panel design can meet different  
 Fit for 19" rack  
 Suitable for SC/LC/FC/ST,etc

## Description:

The case is made of cold rolled steel sheet, electrostatic spraying, provide 12&48 single and double adapter, available for SC/LC/FC/ST.

## Performance:



### Operating condition


- Operating temperature: -25°C ~ +40°C
- Storage temperature: -25°C ~ +55°C
- Relative humidity: ≤85% (+30°C)
- Air pressure: 70Kpa ~ 106Kpa
- Color: Black

## Dimension:



Model	Dimension (LxWxH)
GPX08X4-12-S	483mm×206mm×1U
GPX08X4-12-D	483mm×206mm×1U
GPX08X4-24-S	483mm×206mm×1U
GPX08X4-24-D	483mm×206mm×1U
GPX08X4-36-S	483mm×206mm×1U
GPX08X4-36-D	483mm×206mm×1U
GPX08X4-48-S	483mm×206mm×1U
GPX08X4-48-D	483mm×206mm×1U
GPX08X4-96-2×D(LC)	483mm×206mm×1U

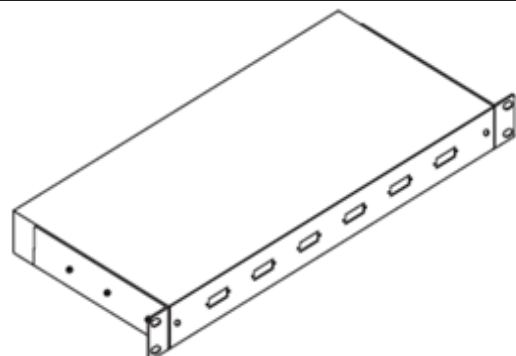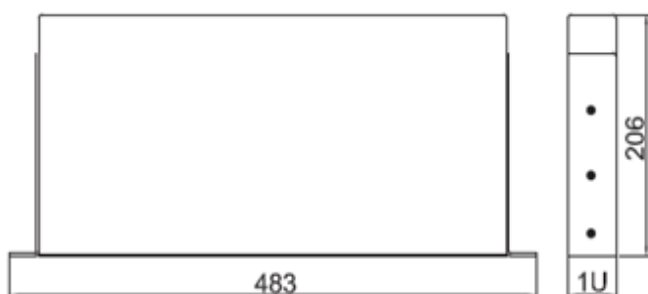

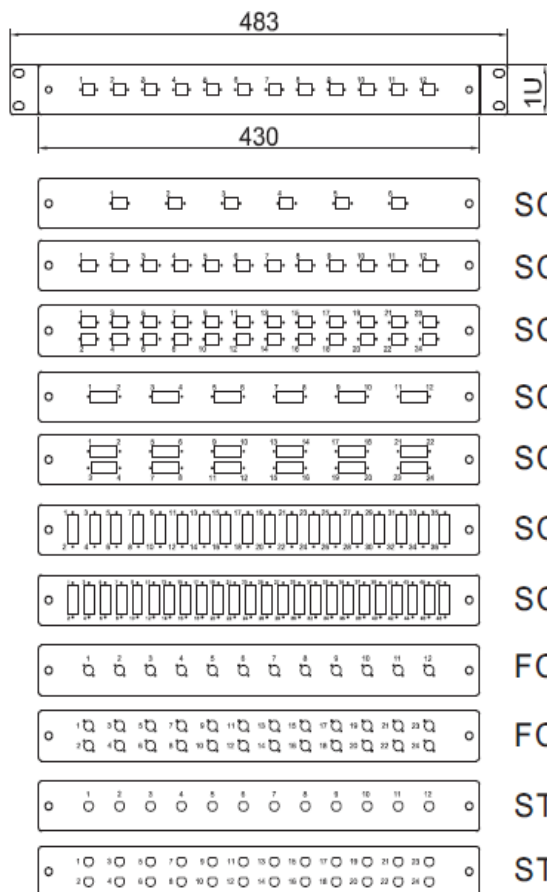

SC(Simplex)/LC(SC Feet), 6Pots  
 SC(Simplex)/LC(SC Feet), 12Pots  
 SC(Simplex)/LC(SC Feet), 24Pots  
 SC(Duplex)/LC(Quad), 6Pots  
 SC(Duplex)/LC(Quad), 12Pots  
 SC(Duplex)/LC(Quad), 18Pots  
 SC(Duplex)/LC(Quad), 24Pots  
 FC, 12Pots  
 FC, 24Pots  
 ST/FC(D Feet), 12Pots  
 ST/FC(D Feet), 24Pots

## Accessories:

1	Heat shrinkable tube	—
2	Nylon Locking Tie Wraps	3PCS
3	CableHoop	2PCS
4	M6 Rack-Screw	4PCS
5	Fix Cable Sticker	3PCS
Notice: “--- ” the number is same to fiber cord number		

- \* Length: 480mm Width: 206mm Height: 1U Weight: 3.1kg Color: Black
- \* Cable entry 4× Ø20mm gland holes

### Order Information:

OPC-GPX08x4-①-②-③

#### ①Ports

12=12Ports  
 24=24Ports

.....  
 C=Customized

#### ②Pigtail Type

0=No pigtail  
 1=SM-SX-SC/PC-1.5m  
 2=MM-SX-SC/PC-1.5m

.....  
 C=Customized

#### ③Adapter Type

0=No Adapter  
 1=SM-SX-SC/PC  
 2=SM-DX-SC/PC

.....  
 C=Customized